

orkanda

Home Lift



Vimec E10
Catalogue Product

Electricity, Environment, Exclusive

The ecovimec elevator fits the home environment with wisdom and elegance.





Electricity, Environment, Exclusive

Ecovimec platform lifting platform
and easy movement add value to
the installation through easy installa-


Available finishes

VIMEC E-10

DOORS



Two-level retractable automatic door (automatic adjustment)



Infrared sensors around the edge of the barrier for entering/exiting the passenger compartment to guarantee maximum safety



Three speed automatic telescopic and landing gates



Double glass hinges for luxury and style.



Panorama in aluminum; lightness in hand



concave veneer



Concave veneer with viewfinder



stainless



RAL color on request

Available finishes

VIMEC E-10

CONTROL PANEL



On The Panel

- A. Impressions
- B. Speaker (optional)
- C. Load indicator
- D. I-BUTTON for electronic access control system
- E. Warning button

Floor

- F. LCD display with trip indicator
- G. Call Button: Green when the elevator is empty.
- H. I-BUTTON FOR ELECTRONIC ACCESS CONTROL

COLORS



cabin wall



cabin platform




support structure




Specifications

VIMEC E-10


DIMENSIONS AND OVERALL SPACES

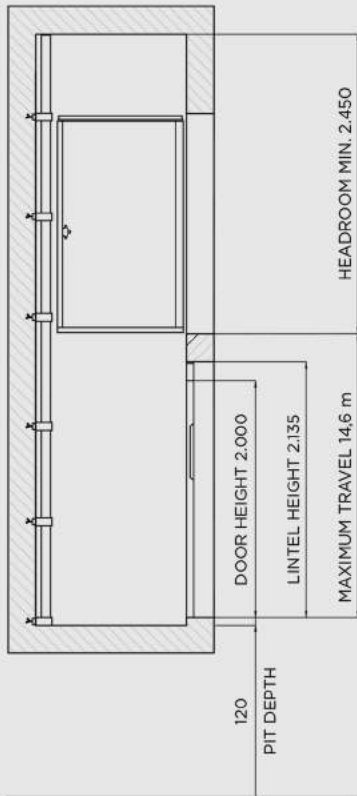


WITH TELESCOPIC DOORS

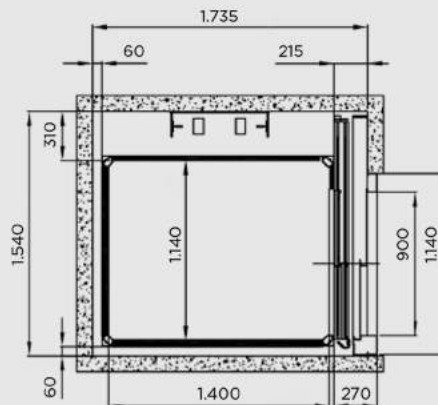

MASONRY SHAFT

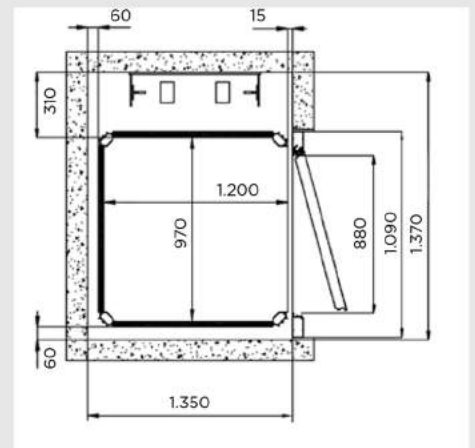

SUPPORTING STRUCTURE

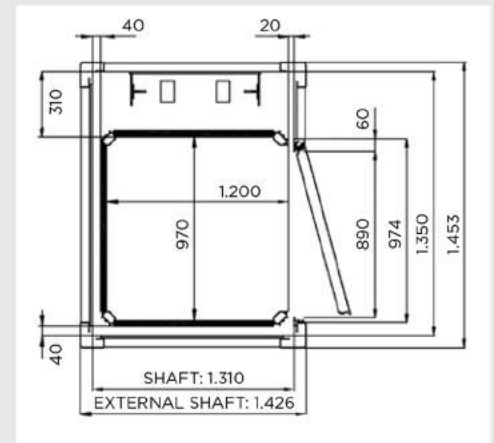


The ECOVIMEC HL (Heavy Load) model has a higher load capacity: 500 kg.

For the HL version is the same as that of ECOVIMEC;
The solution is equipped with a more powerful engine (2.2 kW)
and a stronger and more durable structure The platform size for this model is 1.460x1.170 mm. and 1.300x1.030 mm.

Alternatively, the HL VERSION is available weighted (150 kg only).

This makes it ideal for the most intense applications.

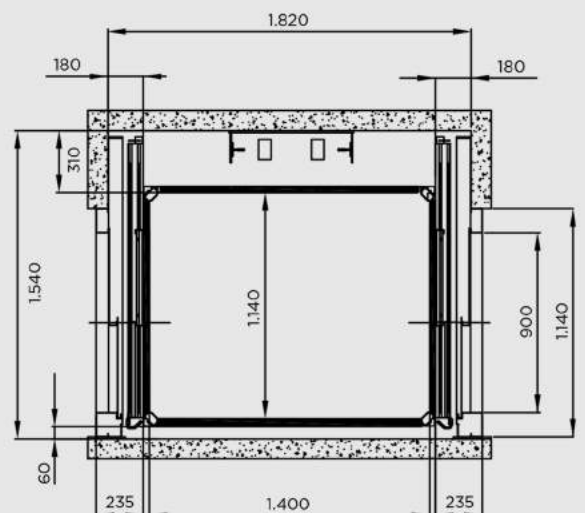

Specifications

VIMEC E-10

standard configuration

Cabin with gray walls "COLOR SERIES" (optional: beige, blue, maple, cherry).
 "RUBBER SERIES" platform with gray stamp Buttons on the plane and on the ground 50 mm. with braille without display "Energy Saving" with LED Strip Ceiling
 Hollow Veneer Door with Window
 Complies with the machinery directive EC 42-2006.

choice

I-BUTTON (electronic key) to manage independent access.
 Announcing the sound to the incoming floor. The sound goes to the floor that enters.
 Auto dial 5 numbers in memory display in the cabin display on the floor panel
 The handle is fixed to the cabin wall for use in public places and for people with disabilities.
 Sliding doors on all cabins and floors electric door operator for swing door fire door
 vertical or horizontal mirror

TECHNICAL DATA

ECOVIMEC - GENERAL FEATURES		
A	DRIVE SYSTEM AND AT-THE-GROUND CONTROL	
B	BELT DRIVE	
C	DRIVE MOTOR	1,5 kW THREE-PHASE 220 V 50 Hz
D	ELECTRIC TRACTION	
E	SOFT START/STOP SYSTEM	
F	VOLTAGE SUPPLY	24 V dc
G	MECHANICAL KEY ENABLING ON-BOARD KEYPAD	
H	NO. 6 ACCESSES MAXIMUM	
I	NO. 2 ACCESSES TO THE FLOOR MAXIMUM	
J	TRICAL SAFETY LOCKS	
K	ON FLOOR CONTROLS WITH "SIMPLE TOUCH"	
L	PIT	120 mm FOR MASONRY SHAFT 140 mm FOR STRUCTURE
M	TECHNICAL DIMENSIONS (ENGINE, BELTS)	310 mm
N	TESTATA MINIMA STANDARD	2.450 mm
O	HEADROOM MINIMUM STANDARD	2.600 mm
P	PLATFORM SIZES AVAILABLE	
Q	2 STANDARD	1.400x1.100 - 1.250x1.000
R	SPECIAL SIZES AVAILABLE UPON REQUEST	

ECOVIMEC - INSIDE THE CABIN	
A	INFRARED BARRIERS ON EACH SIDE OF ENTRY AND IN THE ABSENCE OF WALLS
B	DEVICE OF COMMUNICATION WITH OUTSIDE THE CABIN
C	OVER LOAD INDICATOR
D	50 X 50 mm BUTTONS WITH MECHANICAL SHUTTER AND INDICATION OF THE FLOOR IN ADDITION TO STANDARD BRAILLE
E	ON BOARD CONTROLS HEIGHT COMPLIANT TO EN81-41
F	ILLUMINATED BUTTONS (WITH COLOR IDENTIFICATION OF THE FUNCTION)
G	EMERGENCY BUTTON
H	"ENERGY SAVING" LED BAR LIGHTS
I	ON BOARD PUSH-BUTTON PANEL WITH DEAD-MAN'S CONTROLS-ALWAYS EQUIPPED WITH INFRARED PHOTOCELLS BARRIERS
J	"SINGLE TOUCH" OPERATION (UNIVERSAL MANOEUVRE) WITH WALLS AND DOOR IN THE CABIN
CAPACITY	UP TO 400 kg
MAXIMUM TRAVEL	5 STOPS (14,6M)
SPEED	0,15 m/s

DATA ARE GUIDELINE AND NOT BINDING. VIMEC RESERVES THE RIGHT TO MAKE ANY CHANGES IT CONSIDERS APPROPRIATE.

orkanda

www.orkanda.co.id

Jakarta

Ruko Graha Boulevard,
Jl. Raya Boulevard, RW.1, Klp. Gading Tim,
Kec. Klp. Gading, DKI Jakarta 14240

Surabaya

Jl. Bangka No.8-A, Gubeng,
Kec. Gubeng, Kota SBY, Jawa Timur 60271

Medan

Jl. Puri No.102 A Kota Matsum IV,
Medan, Sumatera Utara 20211

Makassar

Jl. Monginsidi No. 32d, RT.3,
Maricaya Baru, Kec. Makassar,
Sulawesi Selatan 90142



Orkanda lifts Indonesia



@orkandaliftindonesia



@orkanda.id



Orkanda Lift Indonesia



www.orkanda.co.id



(021) 22454705